

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 April 2002 (11.04.2002)

PCT

(10) International Publication Number
WO 02/28923 A1

(51) International Patent Classification⁷: C08F 110/06, 2/06, 2/14

(21) International Application Number: PCT/EP01/11489

(22) International Filing Date: 3 October 2001 (03.10.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
203442.9 5 October 2000 (05.10.2000) EP

(71) Applicant (for all designated States except US): ATOFINA RESEARCH SOCIETE ANONYME [BE/BE]; Zone Industrielle C, B-7181 Seneffe (Feluy) (BE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): DEBRAS, Guy [BE/BE]; Rue Champ de la Chapelle 12, B-6210 Frasnes-lez-Gosselies (BE). DUPIRE, Marc [BE/BE]; Rue Maurice Flament (H.), 4, B-7022 Mons (BE). MICHEL, Jacques [BE/BE]; Rue Saint Ethon, 4, B-7181 Seneffe (BE).

(74) Agent: ATOFINA RESEARCH, S.A.; Patent Department, Zone Industrielle C, B-7181 Seneffe (Feluy) (BE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PRODUCTION OF POLYPROPYLENE

WO 02/28923 A1

(57) Abstract: A process for producing polypropylene, the process comprising homopolymerising propylene or copolymerising propylene with one or more comonomers selected from ethylene and C₄ to C₁₀ 1-olefins in the presence of a metallocene catalyst system comprising (a) a metallocene catalyst of general formula R^{*}(X_{R-m})(Cp' R_n)MQ₂, wherein X is a cyclopentadienyl moiety (Cp) or a heteroatom, Cp' is a substituted or unsubstituted fluorenyl ring; each R is independently hydrogen or hydrocarbyl having 1 to 20 carbon atoms in which 0 ≤ m ≤ 4; each R' is independently hydrocarbyl having 1 to 20 carbon atoms in which 0 ≤ n ≤ 8; R^{*} is a bridge which comprises a C₁-C₂₀ alkylene radical, a dialkyl germanium or silicon or siloxane, or an alkyl phosphine or amine radical, which bridge is substituted or unsubstituted, M is a Group IVB transition metal, vanadium or a lanthanide metal and each Q is hydrocarbyl having 1 to 20 carbon atoms or halogen, and (b) a cocatalyst which activates the catalyst component, the homo- or copolymerisation being performed in a slurry process in a hydrocarbon diluent for the polypropylene or being performed in a solution process in a hydrocarbon solvent for the polypropylene, the concentration of propylene monomer in the diluent or solvent being lower than 70 % by weight, based on the weight of the diluent or solvent, to produce a polypropylene homopolymer or copolymer having long chain branches on the polypropylene molecules.

PRODUCTION OF POLYPROPYLENE

The present invention relates to a method for the production of polypropylene. In particular, the present invention relates to a process for the production of polypropylene having long chain branching. The present invention also relates to polypropylene having particular rheological properties.

Polypropylene resin is used in a variety of different applications. However, polypropylene resin suffers from the problem of having a low melt strength at high melt index, which restricts the use of polypropylene in a number of applications because the polypropylene is difficult to process.

Ziegler-Natta and metallocene catalysts produce linear polypropylene. Such linear polypropylene can suffer from poor melt strength. Also, metallocene catalysts can exhibit poor activity when used in a slurry process with a diluent such as hexane.

It is known in the art to increase the melt strength of polypropylene, for example by irradiating the polypropylene with an electron beam or by reactive extrusion with one or more peroxides and a co-agent such as tetra vinyl silane. It is known that electron beam irradiation or reactive extrusion significantly modifies the structure of a polypropylene molecule. Up to a certain level of irradiation dose, it is possible to produce from a linear polypropylene molecule having been produced using a Ziegler-Natta catalyst, a

THE UNIVERSITY OF CHICAGO

THE UNIVERSITY OF CHICAGO

modified polymer molecule having free-end long branches, otherwise known as long chain branching.

It is known that such long chain branching drastically modifies the rheological behaviour of the polypropylene, for example their elongational and shear viscosity.

WO 00/12572 discloses a branched polypropylene composition having a weight average branching index g of less than 0.95, a polydispersity of less than 4 and a melt point greater than 90°C. These compositions have an improved melt strength and good processability.

US-A-6,060,567 describes a process for polymerising interpolymers having long chain branches with a catalyst composition comprising a) a metal coordination complex comprising a metal atom of groups 3-10 or the Lanthanide series of the periodic table of elements and a cyclic, delocalised π -bonded moiety and b) an activating cocatalyst.

WO 99/41289 discloses a process for for polymerising addition polymerisable polymers with a catalyst composition comprising a) a catalyst system comprising a group 3-10 metal complex and b) a silane or hydrocarbylsilane.

WO 99/02540 discloses metallocene compounds having η^5 ligands comprising at least four fused rings and having a sum of fused rings in all of its η^5 ligands at least 6. This metallocene compound is used in the polymerisation of high molecular weight polyethylene and long-chain branched polypropylene.

EP-A-190,889 discloses free-end long-chain branched polypropylene produced by high energy irradiation.

EP-A-678,527 discloses polypropylene with a degree of branching of substantially 1 by adding and mixing a cross-linking auxiliary to the linear polypropylene and irradiating the mixture with a dose of 1 to 20 kGy.

Polypropylene processing operations where melt strength plays an important role include blow moulding, extrusion coating, thermoforming, fibre spinning and foam extrusion. In thermoforming, a poor melt strength results in a sagging phenomenon. In fibre spinning, a poor melt strength can result in undesired movements of the fibres due to transverse forces, for example by cooling air, which ultimately can lead to "married" fibres and fibre breakage. On the other hand, a too-high melt strength will limit the achievement of low titre fibres. Accordingly, a correct balance between melt strength and drawability is desirable. For blown (biaxially oriented) or cast films also, a correct balance between melt strength and stretchability is very important. In foam extrusion, a poor melt strength results in cell rupture and non-uniform cell structure. For such an application, a poor drawability will limit the fineness of the walls.

The present invention aims to provide a process for producing polypropylene resins having long chain branching, and which can exhibit improved properties, in particular improved melt strength, and also which can be manufactured without the need for an irradiation step or reactive extrusion. It is also an aim of the invention to provide such a process which provides substantially increased long chain branching on the polypropylene molecules. It is a further aim to produce novel polypropylene resins, and in particular such resins having long chain branching which exhibit new properties.

Accordingly, the present invention provides a process for producing polypropylene, the process comprising homopolymerising propylene or copolymerising propylene with one or more comonomers selected from ethylene and C_4 to C_{10} 1-olefins in the presence of a metallocene catalyst system comprising (a) a metallocene catalyst of general formula $R''(XR_m)(Cp'R'_n)MQ_2$, wherein X is a cyclopentadienyl moiety (Cp) or a heteroatom, Cp' is a substituted or unsubstituted fluorenyl ring; each R is independently hydrogen or hydrocarbyl having 1 to 20 carbon atoms in which $0 \leq m \leq 4$; each R' is independently hydrocarbyl having 1 to 20 carbon atoms in which $0 \leq n \leq 8$; R'' is a bridge which comprises a C_1 - C_{20} alkylene radical, a dialkyl germanium or silicon or siloxane, or an alkyl phosphine or amine radical, which bridge is substituted or unsubstituted, M is a Group IVB transition metal, vanadium or a lanthanide metal and each Q is hydrocarbyl having 1 to 20 carbon atoms or halogen, and (b) a cocatalyst which activates the catalyst component, the homo- or co- polymerisation being performed in a slurry process in a hydrocarbon diluent for the polypropylene or being performed in a solution process in a hydrocarbon solvent for the polypropylene, the concentration of propylene monomer in the diluent or solvent being lower than 70% by weight, based on the weight of the diluent or solvent, to produce a polypropylene homopolymer or copolymer having long chain branches on the polypropylene molecules.

The polymerisation temperature for the slurry polymerisation may be from 50 to 120°C, for example 80°C, and the pressure may be from 50 to 60 bars.

THE UNIVERSITY OF CHICAGO

THE UNIVERSITY OF CHICAGO

The polymerisation temperature for the solution polymerisation may be from 50 to 200°C, and the pressure may be from 5 to 100 bars.

The polymerisation period is preferably from a few minutes to several hours.

The homo- or co- polymerisation may be carried out under supercritical conditions in a slurry with the diluent. The diluent may comprise an alkane, such as a C₁-C₄ alkane or a mixture thereof. The diluent may be propane. The temperature and pressure must be above the minimum supercritical values for the diluent (and the amount of monomer present). Propane has a minimum supercritical temperature T_c of 96.8°C and a minimum supercritical pressure P_c of 41.5 bar.

The use of supercritical conditions greatly increases the activity of the metallocene catalyst. The metallocene catalyst is selected so as to be thermally stable under such supercritical conditions. At a temperature and pressure above the supercritical values and most preferably in the absence of hydrogen, the metallocene catalyst activity may be high enough to produce polypropylene resins having very low catalyst residues and with long chain branching.

The slurry process may be a slurry loop process which is carried out in two reactors in series, optionally with one reactor operating under supercritical conditions.

Preferably, the homo- or co- polymerisations are carried out in the absence of hydrogen. Optionally, when there are two reactors in series, one reactor is operated without hydrogen to provide the high degree of long chain branching and the

1. The first step in the process of creating a new product is to identify a market need. This involves conducting market research to determine what consumers want and what problems they are trying to solve. Once a need is identified, the next step is to develop a concept that addresses the need. This is followed by creating a prototype, which is a preliminary model of the product. The prototype is then tested to see if it meets the requirements of the market. If it does, the product is ready for production. If not, the process is repeated until a satisfactory product is developed.

other is operated with hydrogen to provide higher processability, as a result of the formation of lower molecular weight molecules, for the resultant blend of the two fractions.

Preferably, the propylene is a homopolymer produced in the absence of a comonomer.

The polypropylene may be synthesised with batch, semi-continuous or continuous reactors in a slurry or solution process.

The present invention further provides a polypropylene having a branching index g less than 1 and wherein for the relationship between the loss shear modulus G'' and the storage shear modulus G' , at values of the storage shear modulus G' below the value corresponding to the cross-over point, at which cross-over point the storage shear modulus G' is equal to the loss shear modulus G'' and below which the storage shear modulus G' is lower than the loss shear modulus G'' , the ratio $d(\log G'')/d(\log G')$ is greater than 0.9.

Preferably, the ratio $d(\log G'')/d(\log G')$ is greater than 1 at values of the storage shear modulus G' below the value corresponding to the cross-over point.

The present invention yet further provides a polypropylene having a branching index g less than 1 and wherein the relationship between complex viscosity (η) and angular frequency (ω), at a value of angular frequency below the value corresponding to the cross-over point, at which cross-over point the storage shear modulus G' is equal to the loss shear modulus G'' and below which the storage shear modulus G' is

THE UNIVERSITY OF CHICAGO

PHYSICS DEPARTMENT

REPORT OF THE PHYSICS DEPARTMENT FOR THE YEAR 1954-1955

lower than the loss shear modulus G'' , shows an inflection point where $d^2 (\log \eta) / d (\log \omega)^2$ is zero, and below which the viscosity increases.

The present invention still further provides a polypropylene having a branching index g less than 1 and wherein for the relationship between $\tan \delta$, where $\tan \delta$ is the ratio G''/G' , and angular frequency (ω), at a value of angular frequency ω below the value corresponding to the cross-over point, at which cross-over point the storage shear modulus G' is equal to the loss shear modulus G'' and below which the storage shear modulus G' is lower than the loss shear modulus G'' , there is a maximum in the curve where the value of $d(\tan \delta) / d\omega$ is zero.

The polypropylene may be isotactic polypropylene or syndiotactic polypropylene.

The present invention is predicated on the discovery by the present inventors that when polymerising propylene to form isotactic or syndiotactic polypropylene, if a metallocene catalyst having a fluorenyl moiety is employed in combination with a low concentration of propylene monomer, this tends to enhance the formation of long chain branching in the polypropylene molecules. This is particularly enhanced in the absence of hydrogen. Without being bound by theory, it is believed that the low propylene monomer concentration tends to provide an enhanced level of grafting of branches onto the growing unsaturated polypropylene molecules at the expense of reduced monomer incorporation. In contrast, when polypropylene is polymerised in a regular slurry bulk process or in a supercritical propylene process, the isotactic polypropylene is unbranched because the competition between

propylene monomers and unsaturated polypropylene chains for their incorporation into the chains is largely in favour of the propylene monomer insertion.

The polypropylene is produced using a metallocene catalyst having a fluorenyl substituent, which preferably is selected from:

(Me₂C(3-tertiary-Butyl-5-Me-Cp)(Flu)ZrCl₂;

isopropyl-cyclopentadienyl-fluorenyl zirconium dichloride; and

(Ph₂C)((Me₃Si)Cp)(Flu)ZrCl₂.

The Cp is a substituent cyclopentadienyl which is unsubstituted or substituted with, for example, Ph₂CH, Me₃C, Me₃Si, Me, Me and Me₃C, Me and SiMe₃, Me and Ph, or Me and CH₃-CH-CH₃.

The Cp' is a substituent fluorenyl which is unsubstituted or substituted, for example, with each R' being independently YR'₃ in which Y is C or Si and each R' is independently H or hydrocarbyl having 1 to 20 carbon atoms.

The heteroatom X may be, for example, N, P, S or O.

The structural bridge R'' is generally an alkylene radical having 1 to 20 carbon atoms, a dialkyl germanium or silicon or siloxane, alkyl phosphine or amine, preferably Me-C-Me, Ph-C-Ph, -CH₂-, Et-C-Et, Me-Si-Me, Ph-Si-Ph or Et-Si-Et.

The metal M is preferably Zr or Hf and each Q is preferably Cl.


The cocatalyst which activates the metallocene catalyst component can be any cocatalyst known for this purpose such as

• • • • •


ALL INFORMATION CONTAINED HEREIN IS UNCLASSIFIED

an aluminium-containing cocatalyst or a boron-containing cocatalyst. The aluminium-containing cocatalyst may comprise an alumoxane, for example methyl aluminium oxane, in an amount such that $Al/M = 10-2000$. In the slurry loop process, using supported metallocene catalyst, a cocatalyst is injected into the reactor, for example selected from tri-isobutyl aluminium (TIBAL) or triethyl aluminium (TEAL).

The alumoxanes used in the process of the present invention are well known and preferably comprise oligomeric linear and/or cyclic alkyl alumoxanes represented by the formula:



for oligomeric, linear alumoxanes and



For oligomeric, cyclic alumoxane,

wherein n is 1-40, preferably 10-20, m is 3-40, preferably 3-20 and R is a C_1-C_8 alkyl group and preferably methyl.

Generally, in the preparation of alumoxanes from, for example, aluminium trimethyl and water, a mixture of linear and cyclic compounds is obtained.

Suitable boron-containing cocatalysts may comprise a triphenylcarbenium boronate such as tetrakis-

RECEIVED NEW YORK 10/10/54

RECEIVED NEW YORK 10/10/54

pentafluorophenyl-borato-triphenylcarbenium as described in EP-A-0427696, or those of the general formula $[L'-H] + [B Ar_1 Ar_2 X_3 X_4]-$ as described in EP-A-0277004 (page 6, line 30 to page 7, line 7).

Most preferably, the concentration of the propylene monomer in the solvent or diluent is from 30 to 60% by weight, based on the weight of the solvent or diluent.

In the solution polymerisation process, the solvent is a liquid able to dissolve the polymer formed, at the temperature and pressure used for polymerisation and typical solvents include toluene, xylene, cyclohexane and isopar (a mixture of saturated isoparaffins). The metallocene catalyst is preferably used unsupported in the solution process. For toluene, cyclohexane and isopar, the respective polymerisation temperature ranges are given by the solubility of formed PP which is a function of the nature of the solvent, the temperature, the pressure and the type of PP which is produced.

In the slurry polymerisation process, typical diluents include hydrocarbons with 1 to 6 carbon atoms such as propane, isobutane, pentane or hexane. The metallocene catalyst system may be employed in a slurry loop process, and the catalyst may be used supported on an inert support. The inert support may comprise a porous solid support such as talc, inorganic oxides and resinous support materials such as polyolefin. Preferably, the support material is an inorganic oxide in its finely divided form.

Suitable inorganic oxide materials which are desirably employed in accordance with this invention include Group 2a,

THEY HAVE BEEN TAKEN FROM THE MOUNTAINS OF THE

THEY ARE THE ONLY TWO OF THEIR KIND

3a, 4a or 4b metal oxides such as silica, alumina and mixtures thereof. Other inorganic oxides that may be employed either alone or in combination with the silica, or alumina are magnesia, titania, zirconia, and the like. Other suitable support materials, however, can be employed, for example, finely divided functionalized polyolefins such as finely divided polyethylene. Preferably, the support is a silica having a surface area comprised between 200 and 900 m²/g and a pore volume comprised between 0.5 and 4 ml/g.

The amount of alumoxane and metallocenes usefully employed in the preparation of the solid support catalyst can vary over a wide range. Preferably the aluminium to transition metal mole ratio is in the range between 1:1 and 100:1, preferably in the range 5:1 and 50:1.

The order of addition of the metallocenes and alumoxane to the support material can vary. In accordance with a preferred embodiment of the present invention alumoxane dissolved in a suitable inert hydrocarbon solvent is added to the support material slurried in the same or other suitable hydrocarbon liquid and thereafter a mixture of the metallocene catalyst component is added to the slurry.

Preferred solvents include mineral oils and the various hydrocarbons which are liquid at reaction temperature and which do not react with the individual ingredients. Illustrative examples of the useful solvents include the alkanes such as pentane, iso-pentane, hexane, heptane, octane and nonane; cycloalkanes such as cyclopentane and cyclohexane; and aromatics such as benzene, toluene, ethylbenzene and diethylbenzene.

1000000000

1000000000

1000000000

1000000000

1000000000

1000000000

1000000000

1000000000

1000000000

1000000000

1000000000

Preferably the support material is slurried in toluene and the metallocene and alumoxane are dissolved in toluene prior to addition to the support material.

In accordance with the invention, propylene and any optional alpha-olefinic comonomer are supplied to the reactor containing the metallocene catalyst. Typical comonomers include ethylene, butene, 4-methyl-1-pentene and 1-hexene. Hydrogen may be additionally supplied to the reactor, but most preferably no hydrogen is present during the polymerisation. Because the metallocene catalyst component of the present invention exhibits good comonomer response as well as good hydrogen response, substantially all of the comonomer, when present, is consumed.

The MFI of the polypropylene made in accordance with the present invention typically falls in the range 0.1 to 2000 g/10', preferably in the range 0.5 to 1000 g/10'. The melting temperature of the polypropylene is typically above 85°C, most preferably above 100°C. The polypropylene preferably has a weight average molecular weight (Mw) in the range 5 to 5000 kDa, more preferably from 20 to 1000 kDa. The polydispersity index (D) preferably ranges from 2 to 25. The long chain branching facilitates processing of the polypropylene.

The CpFlu catalysts employed in accordance with embodiments of the present invention may be prepared broadly in accordance with the method of Razavi and Ferrara as published in Journal of Organometallic Chemistry, 435(1992) pages 299 to 310.

The polypropylene may be an isotactic polypropylene or a syndiotactic polypropylene. Most particularly, the polypropylene has been polymerised using a metallocene

1944-1945

1946-1947

catalyst, in particular an isotactic polypropylene polymerised using a metallocene catalyst (hereinafter referred to as "miPP"). The polypropylene or polypropylene blend may have a monomodal molecular weight distribution or a multimodal molecular weight distribution, for example a bimodal molecular weight distribution.

This production of higher melt strength polypropylene enables the polypropylene to be used in a variety of different applications where melt strength is required when the polymer is processed from the melt, for example in blow moulding, blowing of films, extrusion thermoforming and in the production of foams.

The polypropylene may be a homopolymer of propylene or a random or block copolymer of propylene and one or more olefins selected from ethylene and C_4 to C_{10} 1-olefins, which may be linear or branched. For example, the polypropylene may be an ethylene-propylene random copolymer containing up to 10wt% ethylene. The polypropylene homopolymer may be used as a matrix phase which is toughened by rubber particles, for example ethylene-propylene rubber particles, typically in an amount of up to 30wt%.

Following polymerisation, the polypropylene may be washed with an acidic solution of an alcohol, for example methanol or isopropanol to precipitate it from a solvent for homogeneous polymerisation. The fluff is treated with conventional antioxidant additives to stabilise the polypropylene. Thereafter the polyolefin is mechanically processed in the melt, e.g. by extrusion, and granulated.

THE JOURNAL OF THE

AMERICAN MEDICAL ASSOCIATION
PUBLISHED WEEKLY
CHICAGO, ILL., U.S.A.
Vol. 41, No. 1, January 1951

In accordance with a preferred aspect of the invention, the polypropylene has increased melt strength. This particular rheological property provides an outstanding processing behaviour which allows the polypropylene based polymers produced in accordance with the invention to be suitable particularly for producing films, sheets, fibres, pipes, foams, hollow articles, panels and coatings.

The invention will now be described in greater detail with reference to the following non-limiting examples and the accompanying drawings, in which:-

Figure 1 is a graph showing the relationship between the storage shear modulus $\log G'$ and the loss shear modulus $\log G''$ for polypropylenes produced in accordance with Example 1 and Comparative Examples 1 and 5;

Figure 2 is a graph showing the relationship between complex viscosity η and angular frequency ω for polypropylenes produced in accordance with Examples 1, 2 and 3 of the process of the invention and Comparative Examples 1, 2 and 5;

Figure 3 is a graph showing for Examples 1, 2 and 3 and Comparative Examples 1, 2 and 5 the relationship between $\tan \delta$ and angular frequency ω .

The present invention will now be described in greater detail with reference to the following non-limiting Examples.

EXAMPLES 1 AND 2

In these Examples, an isotactic polypropylene homopolymer was produced using a metallocene catalyst (thereby producing miPP

representing metallocene-synthesised isotactic polypropylene) comprising $\text{Me}_2\text{C}(\text{3-tertiary-butyl-5-methyl-cyclopentadienyl})$ (fluorenyl) zirconium dichloride, the polymerisation having been performed without the addition of hydrogen gas during the polymerisation process. The polymerisation was performed in a 3 litre laboratory batch reactor containing an amount of solvent or diluent and an amount of propylene monomer. The reactor had been purged at 110°C under nitrogen for 1 hour, and then cooled to the reaction temperature of 80°C . In Examples 1 and 2 the catalyst was in an amount of, respectively, 20mg and 52mg. In each case the cocatalyst was methyl aluminium oxane (MAO) in an amount of 850ppm by weight based on the amount of diluent. The MAO was added as 1.5ml of a 30wt% solution in toluene. In Example 1 the polymerisation was carried out using toluene as a solvent, with there being 1 litre of toluene and 1 litre of propylene. In Example 2, the polymerisation was carried out using isobutane as a diluent, with there being 1 litre of isobutane and 1 litre of propylene. In each Example therefore, the volume ratio of propylene monomer to solvent or diluent was 50/50. The reaction temperature was 80°C and the pressure was 30 bar. The reaction time was 1 hour. The reaction was terminated by venting the unreacted monomer. No hydrogen or comonomer was fed.

For Example 1, 30 gram of polypropylene fluff was obtained after polymerisation by being washed with an acidic solution of isopropanol to precipitate the polymer and dried. The yield of the homogeneous (unsupported) polymerisation was 1525gPP/g catalyst. For Example 2, the polypropylene fluff was recovered directly after polymerisation and dried. The yield of the homogeneous (unsupported) polymerisation was 11500gPP/g catalyst.

1. The first part of the document is a list of the names of the persons who have been appointed to the various positions of the Board of Directors of the Corporation.

2. The second part of the document is a list of the names of the persons who have been appointed to the various positions of the Board of Directors of the Corporation.

In all of the Examples and Comparative Examples, the fluff was stabilised with an anti-oxidant additive, comprising 5000ppm, based on the weight of the fluff, of an anti-oxidant available in commerce from CIBA Speciality Chemicals under the trade name Irganox B215.

The resultant miPP had a melt flow index (MFI) of around 320 dg/min for Example 1 and around 700dg/min for Example 2. In this specification, the melt flow index (MFI) is measured by the procedure of ASTM D 1238 using a load of 2.16kg at a temperature of 230°C for polypropylene. NMR analysis yielded an ~~mmmmmm~~ pentad of 82% and 79% respectively for Examples 1 and 2.

The properties of the polypropylene of Examples 1 and 2 are shown in Table 1.

The molecular weight distribution was determined by gel permeation chromatography. This resulted in a value for M_w , the weight average molecular weight, and a value for the polydispersity index (D) which is M_w/M_n , where M_n is the number average molecular weight. For the gel permeation chromatography of branched molecules, the measured molecular weight tends to be underestimated compared to linear molecules.

It is known that a strong increase of melt viscosity (η) at low frequency is observed for polypropylene containing long chain branching structures. The relationship between the shear viscosity of the polypropylene melt and the circular frequency is dependent upon the degree of long chain branching.

In order to quantify the amount of long chain branching in isotactic and syndiotactic polypropylene, the applicant has formulated a parameter, referred to herein as the branching factor g , which is determined from the rheological properties of the polymer. The long chain branching factor g was established by the ratio $M_w(\text{COP})/M_w(\eta_0)$ where $M_w(\text{COP})$ is the weight average molecular weight calculated from the cross-over point coordinates (W_c and G_c) (as discussed hereinbelow) and $M_w(\eta_0)$ is the weight average molecular weight calculated from zero shear viscosity. The branching factor is equal to 1 ± 0.1 for linear isotactic or syndiotactic polypropylene and is less than 1 for isotactic or syndiotactic polypropylene with long chain branching. The branching factor g is determined from the ratio of two weight average molecular weight (M_w) values inferred from a dynamic frequency sweep on a viscoelastimeter such as the models available in commerce under the trade names RDA 700 or ARES 700 from the company Rheometrics Scientifics.

The branching factor is determined as follows. For the viscoelastimeter available from Rheometrics Scientifics under the trade name ARES, the operating conditions were set up as follows: the strain was set up to be from 10 to 20%, i.e. in the linear viscoelastic range; the frequency sweep was from 0.1 to 500 radians/second; the plate-plate geometry was 25mm diameter, with a polymer thickness therebetween of typically around 2mm. In some instances, the same testing experiment was conducted at different melt temperatures, for example at 190°C and 210°C, and the viscoelastic responses expressed at the reference temperature of 230°C using a master curve approach, which is described in the paper entitled

1900-1901 1902-1903 1904-1905 1906-1907 1908-1909 1910-1911

1912-1913 1914-1915 1916-1917 1918-1919 1920-1921 1922-1923

"Temperature dependence of polyolefin melt rheology", H. Mavridis and R.N. Shroff, Polymer Eng. Sci. 32, 1778 (1992).

From the data obtained, the storage (G') and loss (G'') shear moduli, as well as the complex shear melt viscosity (η^*) were plotted as a function of circular frequency at the reference temperature of 230°C. A cross-over point (COP) for the storage and loss shear moduli was observed for all the isotactic polypropylenes investigated. The cross-over point (COP) coordinates $G' = G'' = G_c$ and the corresponding circular frequency W_c of the cross-over point, or when there is more than one cross-over point at the cross-over point of highest frequency, can be used to infer information pertaining to the weight average molecular weight M_w and its polydispersity as first proposed in the paper by G.R. Zeichner and P.D. Patel, Proc. 2nd World Cong. Chem. Eng. 6, 333 (1981).

The applicants tested 33 linear isotactic polypropylenes with M_w values ranging from 70 kDa to 1200 kDa and polydispersity index ($D = M_w/M_n$) values of from 2 to 25 and found the following equation for the molecular weight at the cross-over point to apply:

$$M_w \text{ (COP)} = \exp \cdot (6.767 - 0.187 * (\ln W_c) - 0.0129 * (\ln W_c)^2) \quad (\text{for isotactic PP})$$

The weight average molecular weight (M_w) is specified in kDa, and is calculated with a standard deviation estimated to be around 5%.

For the value M_w (η_0) which is the weight average molecular weight at zero shear viscosity, this is calculated as follows. From the shear viscosity curve, it is possible to extrapolate

1-10-1914

the viscosity to the zero shear rate viscosity using an equation known as the Carreau-Yasuda equation which is described in the paper entitled "Correlation Between Molecular Structure and Rheological Behaviour of Polypropylene", K. Bernreitner, W. Neissl and M. Gahleitner, Polymer Testing, 11, 89 (1992). As is well known in the literature, a power law relationship exists between η_0 and M_w . Accordingly, using the same data as set out for the cross-over point, the following equation for the weight average molecular weight at zero shear viscosity has been determined:

$$M_w(\eta_0) = \exp(3.5897 + 0.267 \cdot \ln(\eta_0)) \text{ (for isotactic PP)}$$

Similar equations relating M_w to COP and η_0 can be derived for syndiotactic polypropylene (sPP).

The weight average molecular weight M_w is expressed in kDa with a standard deviation around 6%. The viscosity is expressed in Pascal. seconds.

The branching factor g for any given isotactic or syndiotactic polypropylene is the ratio between the calculated value M_w (COP) and $M_w(\eta_0)$.

In the Examples and Comparative Examples, the rheological measurements were performed on a Rheometrics apparatus at 230°C (0.01 - 1000 radians/second maximum range when using master curves).

For Examples 1 and 2 the activation energy E_a was determined and was respectively 58 and 48 kJ/mol. These relatively high energy values indicate significant long chain branching. For

THE UNIVERSITY OF CHICAGO PRESS

linear isotactic polypropylenes, the activation energy E_a is between 37 and 42 kJ/mol.

The branching factor g was determined for Examples 1 and 2 and gave respective values of 0.61 and 0.5. These are significantly less than the value of 1 for linear polypropylene.

For each of the polypropylenes of Examples 1 and 2, the relationship between the logarithmic values of G'' and G' were determined and for Example 1 results are shown in Figure 1. In accordance with the invention, for the relationship between the loss shear modulus G'' and the storage shear modulus G' , at values of the storage shear modulus G' below the value corresponding to the cross-over point, at which cross-over point the storage shear modulus G' is equal to the loss shear modulus G'' and below which the storage shear modulus G' is lower than the loss shear modulus G'' , the ratio $d(\log G'')/d(\log G')$ is greater than 0.9. For Figure 1, the slope of the curve in the low frequency region (low G' below around 100 Pa) the slope was 2.04. The corresponding slope for Example 2 was 1.7. The existence of a slope in the plot of $\log G''$ versus $\log G'$ which is greater than 1 indicates the presence of significant long chain branching. This is in contrast with polypropylene having long chain branching obtained by a post reactor process such as irradiation or the addition of peroxide plus a co-agent, which gives a slope of 0,7 to 0.9, compared to a scope of from 0.6 to 0.7 for linear isotactic polypropylene.

The polypropylene polymers of this invention exhibit rheological features that can be ascribed to the presence of long chain branching structures, for example a branching

...the ...

1. *Chlorophyll a* and *Chlorophyll b* were determined by the method of Arar and Collins (1971) using a Shimadzu 1010 spectrophotometer. The concentration of chlorophyll was expressed in $\mu\text{g mL}^{-1}$ of the sample.

factor g below 0.9, in contrast to the value for linear polypropylenes which is 1 ± 0.1 , an activation energy E_a above 42 kJ/mol for isotactic PP, and a slope in the $\log G'' - \log G'$ curve above 0.7 for G' values below the crossover point, typically below 100 Pa.

Moreover, the polypropylenes produced in accordance with the invention exhibit particular flow curves in the relationship between complex viscosity and frequency, namely the presence of a sigmoidal curve with a yield stress at low frequency. Thus as shown in Figure 2, when the value of the complex viscosity is plotted against frequency for the polypropylenes of Examples 1 and 2, there is an inflection point in the plot at values below about 2 radians per second leading to a significant increase (greater than 10%) in the complex viscosity at lower frequencies. Thus the polypropylenes exhibit a yield point in their flow curve at low frequencies, and the shear viscosity can no longer be described by the Carreau-Yasuda equation. This was manifested by a sigmoidal shape for the plot representing the relationship between complex viscosity and frequency. Such a sigmoidal curve is represented mathematically wherein for the relationship between complex viscosity (η) and angular frequency (ω), at a value of angular frequency below the value corresponding to the cross-over point, at which cross-over point the storage shear modulus G' is equal to the loss shear modulus G'' and below which the storage shear modulus G' is lower than the loss shear modulus G'' , the value of $d^2(\log \eta)/d(\log \omega)^2$ is zero. This characteristic distinguishes the polypropylenes produced in accordance with this invention from those of high melt strength polypropylenes containing long chain branching produced by irradiation or reactive extrusion with peroxides and possibly co-agents. In contrast, such known high melt

strength polypropylenes having long chain branching do not exhibit a yield point in the flow curve and do not exhibit a sigmoidal flow curve. Rather, the value of the complex viscosity levels off to a maximum value at low frequencies below around 2 radians per second.

As discussed in the paper entitled "Long chain branching and viscoelasticity of ethylene-propylene-diene elastomers", Kautschukt & Gummi Kunststoffe, Volume 44, page 128, 1991 by H.C. Booij, a lower difference between the phase angle at 0.1 and 100 radians per second in the time-temperature region close to the terminal relaxation of linear chains means more long chain branching in the polypropylene. The viscoelastic damping is represented by the value $\tan \delta$ (the ratio G''/G') for the polypropylene produced in accordance with the present invention having a maximum in the value of $\tan \delta$ at low frequency, namely at frequencies below the cross-over point where G'' is greater than G' . This is represented mathematically wherein for the relationship between $\tan \delta$, where $\tan \delta$ is the ratio G''/G' , and angular frequency (ω), at a value of angular frequency ω below the value corresponding to the cross-over point, at which cross-over point the storage shear modulus G' is equal to the loss shear modulus G'' and below which the storage shear modulus G' is lower than the loss shear modulus G'' , the value of $d(\tan \delta)/d\omega$ is zero. This is illustrated in Figure 3 where for the polypropylenes of both Example 1 and Example 2, a maximum value for $\tan \delta$ is found lower than a frequency value of 100 radians per second. In contrast, for linear polypropylenes and high melt strength polypropylenes produced by irradiation, a continuous increase of the damping parameter $\tan \delta$ is observed for frequencies below the cross-over point defined by the frequency at which

G' equals G'' and below which G'' is greater than G' . For a given value of frequency, the damping increases as the molecular weight increases. At constant values of MFI, the samples with long chain branching have lower damping than the linear sample. For the polypropylene of Example 1, the damping parameter $\tan \delta$ at 0.1 radian per second is below that of the most branched polypropylene sample and the maximum in $\tan \delta$ was observed at 25 radians per second below the frequency of the cross-over point (900 radians per second).

Furthermore, the polypropylenes exhibiting long chain branching produced in the course of the invention also exhibit more than one cross-over point (COP) constituted by a critical frequency where the storage shear modulus G' and the loss shear modulus G'' are equal. The additional crossover points are at frequencies below the classical crossover point frequency exhibited by linear polypropylene molecules or by polypropylene of high melt strength which have been irradiated or subjected to treatment by peroxides.

The isotactic polypropylenes produced in accordance with Examples 1 and 2 both exhibit several cross-over points.

EXAMPLE 3

In this Example, syndiotactic polypropylene (sPP) was produced using 41.58 litres of cyclohexane as diluent to which 30 weight percent propylene as monomer had been added. After introduction of the catalyst, comprising 75 mg of isopropyl-cyclopentadienyl-fluorenyl zirconium dichloride and a co-catalyst comprising MAO in an amount of 120 ml added in three steps, the polymerisation proceeded for a period of two hours at a temperature of 55°C. The amount of sPP obtained was 5160 grams, representing a yield of 69067 gPP/g catalyst.

The properties of the polypropylene are summarised in Table 1.

This sPP exhibited a flow curve exhibiting a yield point for the relationship between the complex viscosity and frequency, three cross-over points, a maximum in $\tan \delta$ below the cross-over point and a high slope in the $\log G''/\log G'$ curve.

COMPARATIVE EXAMPLE 1,

In this Comparative Example, a catalyst comprising $(\text{Me}_2\text{Si}(\text{2Me-Benzyl-Indenyl})_2\text{ZrCl}_2$ on a support of MAO-treated silica was employed in bulk propylene monomer to yield an isotactic polypropylene having the properties shown in Table 1. The relationship between $\log G''$ and $\log G'$ is shown in Figure 1. It may be seen that below a value of $\log G'$ being 100Pa, the slope of the plot is less than 1 (0.62). The relationship between complex viscosity and frequency is shown in Figure 2. It may be seen that there is no yield point at low frequency. The relationship between $\tan \delta$ and frequency is shown in Figure 3. It may be seen that there is no maximum value for $\tan \delta$ at a frequency below 100 radians/second.

COMPARATIVE EXAMPLE 2

In this Comparative Example, the same catalyst as that of Example 1 was employed in an amount of 13mg to produce isotactic polypropylene. However, the polymerisation was performed in the absence of toluene as a solvent. Instead, polymerisation was performed solely in liquid propylene monomer. Thus, two litres of propylene were introduced into the reactor. After a reaction period of thirty minutes, 218g of isotactic propylene fluff were obtained. The properties of the polypropylene produced are summarised in Table 1. The relationship between complex viscosity and frequency is shown in Figure 2. It may be seen that there is no yield point at low frequency. The relationship between $\tan \delta$ and frequency is shown in Figure 3. It may be seen that there is no maximum value for $\tan \delta$ at a frequency below 100 radians/second.

COMPARATIVE EXAMPLE 3

In this Comparative Example, a catalyst comprising 2.5mg of benzyl indenyl zirconium dichloride was added to two litres of propylene monomer in the reaction vessel of Example 1. The reaction was stopped after a period of twenty minutes because of the high yield, namely 230,000g/g catalyst. The isotactic polypropylene also had the properties indicated in Table 1.

COMPARATIVE EXAMPLE 4

In this Comparative Example, Comparative Example 3 was repeated but with one litre of toluene being substituted for one litre of propylene monomer (to give a 50/50 volume ratio of propylene to solvent) and with the catalyst being present

in an amount of 0.7mg. The isotactic polypropylene recovered had the properties summarised in Table 1.

COMPARATIVE EXAMPLE 5

The polypropylene of this Comparative Example comprised a high melt strength polypropylene available in commerce from Montell under the trade name PROFAX 813. It may be seen from Figure 3 that this polypropylene did not exhibit a maximum in the value of $\tan \delta$ at frequencies below 100 radians per second. Also, no inflection is detected in the flow curve (Figure 2) and the slope in the graph G'' versus G' is below 0.9 (Figure 1 and Table 1). This result emphasises the difference in molecular structure between polypropylenes produced in accordance with the invention and known high melt strength polypropylenes also with long chain branching.

With the exception of the Comparative Example 5, in all of the other Comparative Examples, it may be seen that the activation energy E_a is lower than 42 kJ/mol indicating that the polypropylene molecules produced have a low degree of long chain branching and are substantially linear. The polypropylenes of the Comparative Examples 1 to 4 also have a branching index g which is around 1, indicating linearity of the polypropylene molecules. For each of Comparative Examples 1 to 4, the slope of the plot of $\log G''$ against $\log G'$ is less than 0.7, again indicating linearity. For none of the polypropylenes produced in accordance with the Comparative Examples 1 to 4 was there a yield in the flow curve or a maximum in the $\tan \delta$ / frequency graph. Furthermore, none of the polypropylenes produced in accordance with the Comparative Examples exhibited several cross-over points in the plot between both G' and G'' and frequency. The Comparative

Examples 1 to 4 show that when isotactic polypropylene is synthesised in bulk (i.e. with high concentration of propylene monomer) with cyclopentadienyl fluorenyl (CpFlu) or other catalysts, or synthesised in solution with bisindenyl catalysts, the isotactic polypropylene does not show any significant rheological features of long chain branching. Rather, the polypropylenes behave like typical linear polypropylenes.

TABLE 1

Sample	M_w (kDa)	$D=M_w/M_n$	MFI (dg/min)	g	Slope log G''- log G'	Yield in flow curve	Max in tan δ	Several COPs	Ea (kJ/mol)	% Diluent or Solvent	Catalyst Family
Example 1	93	4.4	320	0.61	2.04	Yes	Yes	Yes	58	50	Flu
Example 2	59.3	2.7	700	0.5	1.7	Yes	Yes	Yes	48	50	Flu
Example 3	100	3	30	0.5	1.7	Yes	Yes	Yes	-	30	Flu
Comparative Example 1	100	5.5	390	1.05	0.62	No	No	No	38	0	Benzyl Indenyl
Comparative Example 2	341	3.5	1.6	0.98	0.68	No	No	No	40	0	Flu
Comparative Example 3	373	3.3	2.8	0.98	0.63	No	No	No	38	0	Benzyl Indenyl
Comparative Example 4	202	4.3	16.2	0.95	0.63	No	No	No	38	50	Benzyl Indenyl
Comparative Example 5	404	9.5	3	0.49	0.85	No	No	No	78	-	-

* not measured

CLAIMS:

1. A process for producing polypropylene, the process comprising homopolymerising propylene or copolymerising propylene with one or more comonomers selected from ethylene and C_4 to C_{10} 1-olefins in the presence of a metallocene catalyst system comprising (a) a metallocene catalyst of general formula $R''(XR_m)(Cp'R'_n)MQ_2$, wherein X is a cyclopentadienyl moiety (Cp) or a heteroatom, Cp' is a substituted or unsubstituted fluorenyl ring; each R is independently hydrogen or hydrocarbyl having 1 to 20 carbon atoms in which $0 \leq m \leq 4$; each R' is independently hydrocarbyl having 1 to 20 carbon atoms in which $0 \leq n \leq 8$; R'' is a bridge which comprises a C_1 - C_{20} alkylene radical, a dialkyl germanium or silicon or siloxane, or an alkyl phosphine or amine radical, which bridge is substituted or unsubstituted, M is a Group IVB transition metal, vanadium or a lanthanide metal and each Q is hydrocarbyl having 1 to 20 carbon atoms or halogen, and (b) a cocatalyst which activates the catalyst component, the homo- or co- polymerisation being performed in a slurry process in a hydrocarbon diluent for the polypropylene or being performed in a solution process in a hydrocarbon solvent for the polypropylene, the concentration of propylene monomer in the diluent or solvent being lower than 70% by weight, based on the weight of the diluent or solvent, to produce a polypropylene homopolymer or copolymer having long chain branches on the polypropylene molecules.

2. A process according to claim 1 wherein for the slurry polymerisation the polymerisation temperature is from 50 to 120°C and the pressure is from 5 to 60 bars.

3. A process according to claim 2 wherein the diluent is at least one hydrocarbon having from 1 to 6 carbon atoms.
4. A process according to claim 3 wherein the diluent is at least one C₃ to C₆ alkane.
5. A process according to claim 1 wherein for the solution polymerisation the polymerisation temperature is from 50 to 200°C and the pressure is from 5 to 100 bars.
6. A process according to claim 5 wherein the solvent is selected from at least one of toluene, xylene, cyclohexane and isopar.
7. A process according to any foregoing claim wherein the homo- or co- polymerisations are carried out in the absence of hydrogen.
8. A process according to any foregoing claim wherein the homo- or co-polymerisation is carried out in two reactors in series.
9. A process according to claim 8 wherein a first reactor is operated without hydrogen and a second reactor is operated with hydrogen.
10. A process according to any foregoing claim wherein the polypropylene is synthesised in at least one batch, semi-continuous or continuous reactor in a slurry or solution process.
11. A process according to claim 2, 3 or 4, or any one of claims 7 to 10 when appendant on claim 2, wherein the homo- or

co- polymerisation is carried out under supercritical conditions in a slurry with the diluent.

12. A process according to claim 11 wherein the diluent comprises a C₁-C₄ alkane or a mixture thereof.

13. A process according to claim 12 wherein the diluent is propane.

14. A process according to any foregoing claim wherein the slurry process is a slurry loop process which is carried out in two reactors in series.

15. A process according to claim 14 wherein one reactor is operated under supercritical conditions.

16. A process according to any foregoing claim wherein X comprises a cyclopentadienyl moiety (Cp).

17. A process according to claim 16 wherein the catalyst comprises Me₂C(3-tertiary-butyl-5-methyl-cyclopentadienyl) (fluorenyl) zirconium dichloride.

18. A process according to claim 16 wherein the catalyst comprises isopropyl-cyclopentadienyl-fluorenyl zirconium dichloride.

19. A process according to any foregoing claim wherein the concentration of propylene monomer in the diluent or solvent is from 30 to 50% by weight, based on the weight of the diluent or solvent.

20. A polypropylene having a branching index g less than 1 and wherein for the relationship between the loss shear modulus G'' and the storage shear modulus G' , at values of the storage shear modulus G' below the value corresponding to the cross-over point, at which cross-over point the storage shear modulus G' is equal to the loss shear modulus G'' and below which the storage shear modulus G' is lower than the loss shear modulus G'' , the ratio $d(\log G'')/d(\log G')$ is greater than 0.9.

21. A polypropylene according to claim 20 wherein the ratio $d(\log G'')/d(\log G')$ is greater than 1 at values of the storage shear modulus G' below the value corresponding to the cross-over point.

22. A polypropylene having a branching index g less than 1 and wherein the relationship between complex viscosity (η) and angular frequency (ω), at a value of angular frequency below the value corresponding to the cross-over point, at which cross-over point the storage shear modulus G' is equal to the loss shear modulus G'' and below which the storage shear modulus G' is lower than the loss shear modulus G'' , shows an inflection point where $d^2(\log \eta)/d(\log \omega)^2$ is zero and below which the viscosity η increases.

23. A polypropylene having a branching index g less than 1 and wherein for the relationship between $\tan \delta$, where $\tan \delta$ is the ratio G''/G' , and angular frequency (ω), at a value of angular frequency ω below the value corresponding to the cross-over point, at which cross-over point the storage shear modulus G' is equal to the loss shear modulus G'' and below which the storage shear modulus G' is lower than the loss

shear modulus G'' , there is a maximum in the curve where the value of $d(\tan \delta)/d\omega$ is zero.

24. A polypropylene according to any one of claims 20 to 23 which is an isotactic polypropylene or a syndiotactic polypropylene.

25. A polypropylene according to any one of claims 20 to 24 wherein the polypropylene is a homopolymer of propylene.

26. A polypropylene according to any one of claims 20 to 25 wherein the polypropylene is a random or block copolymer of propylene and one or more olefins selected from ethylene and C_4 to C_{10} 1-olefins, which may be linear or branched.

27. A polypropylene according to any one of claims 20 to 26 wherein the MFI of the polypropylene is in the range 0.1 to 2000 g/10'.

28. A polypropylene according to any one of claims 20 to 27 wherein the melting temperature of the polypropylene is above 85°C.

29. A polypropylene according to any one of claims 20 to 28 wherein the polypropylene has a weight average molecular weight (Mw) in the range 5 to 5000 kDa.

30. A polypropylene according to any one of claims 20 to 29 wherein the polydispersity index (D) of the polypropylene ranges from 2 to 25.

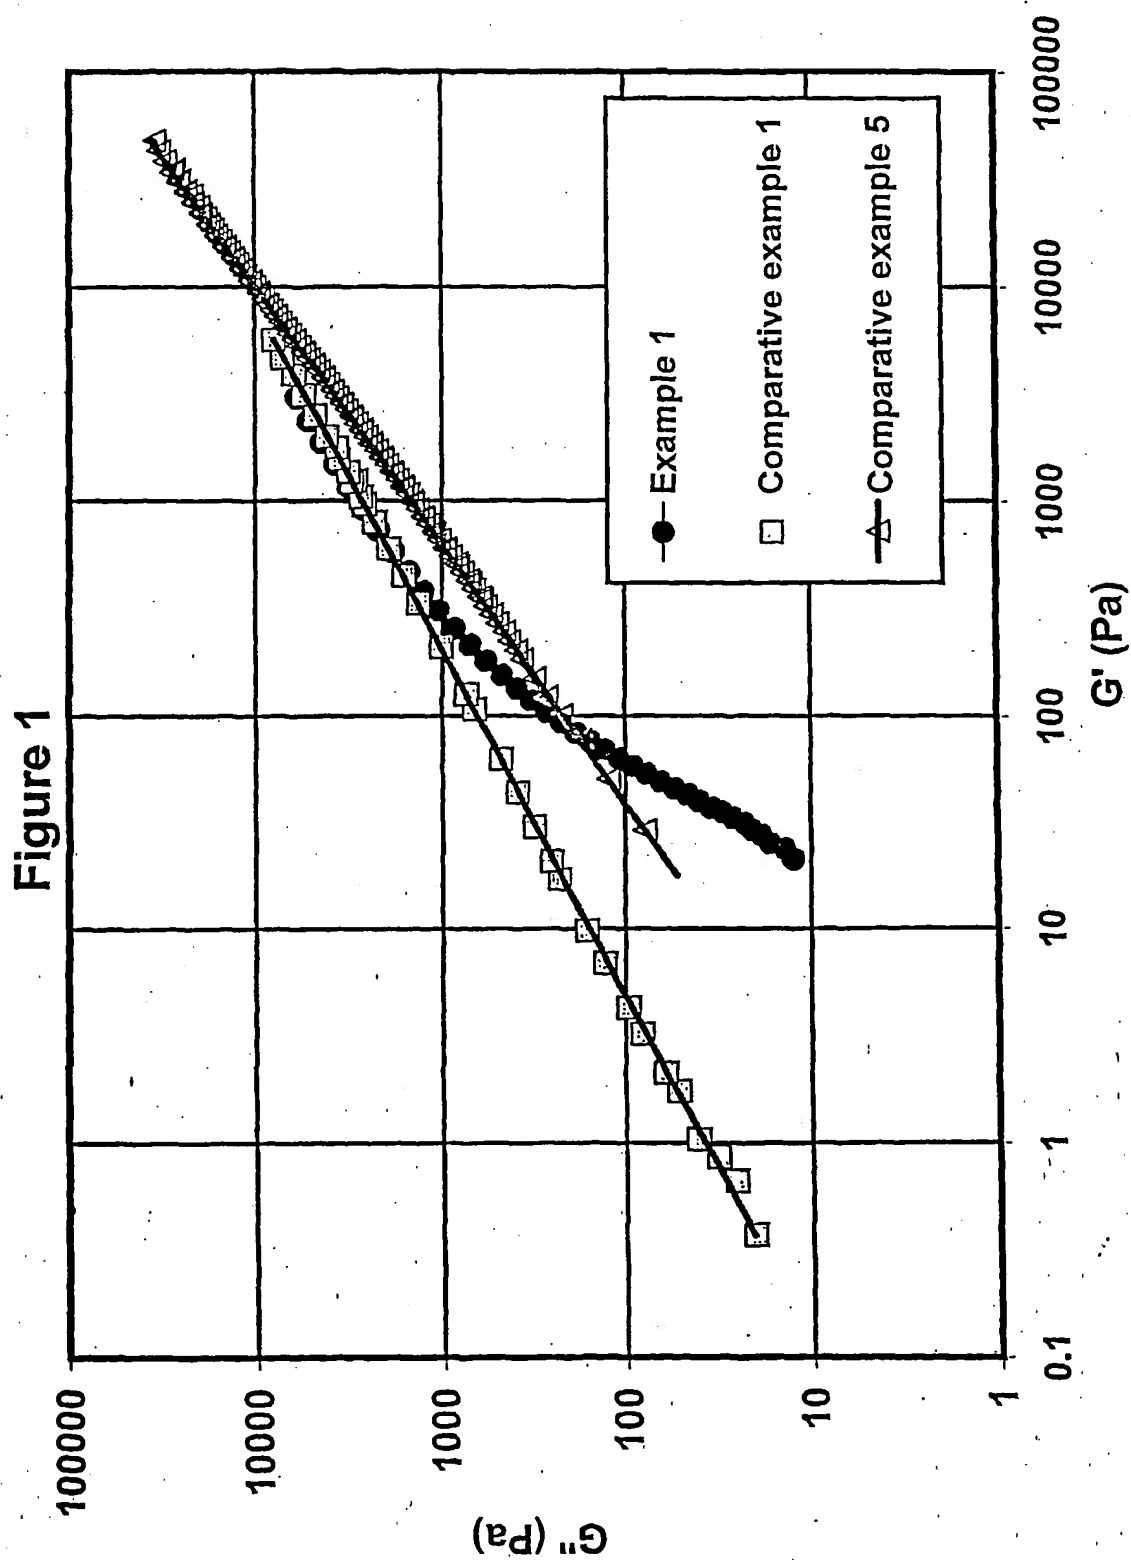


Figure 2


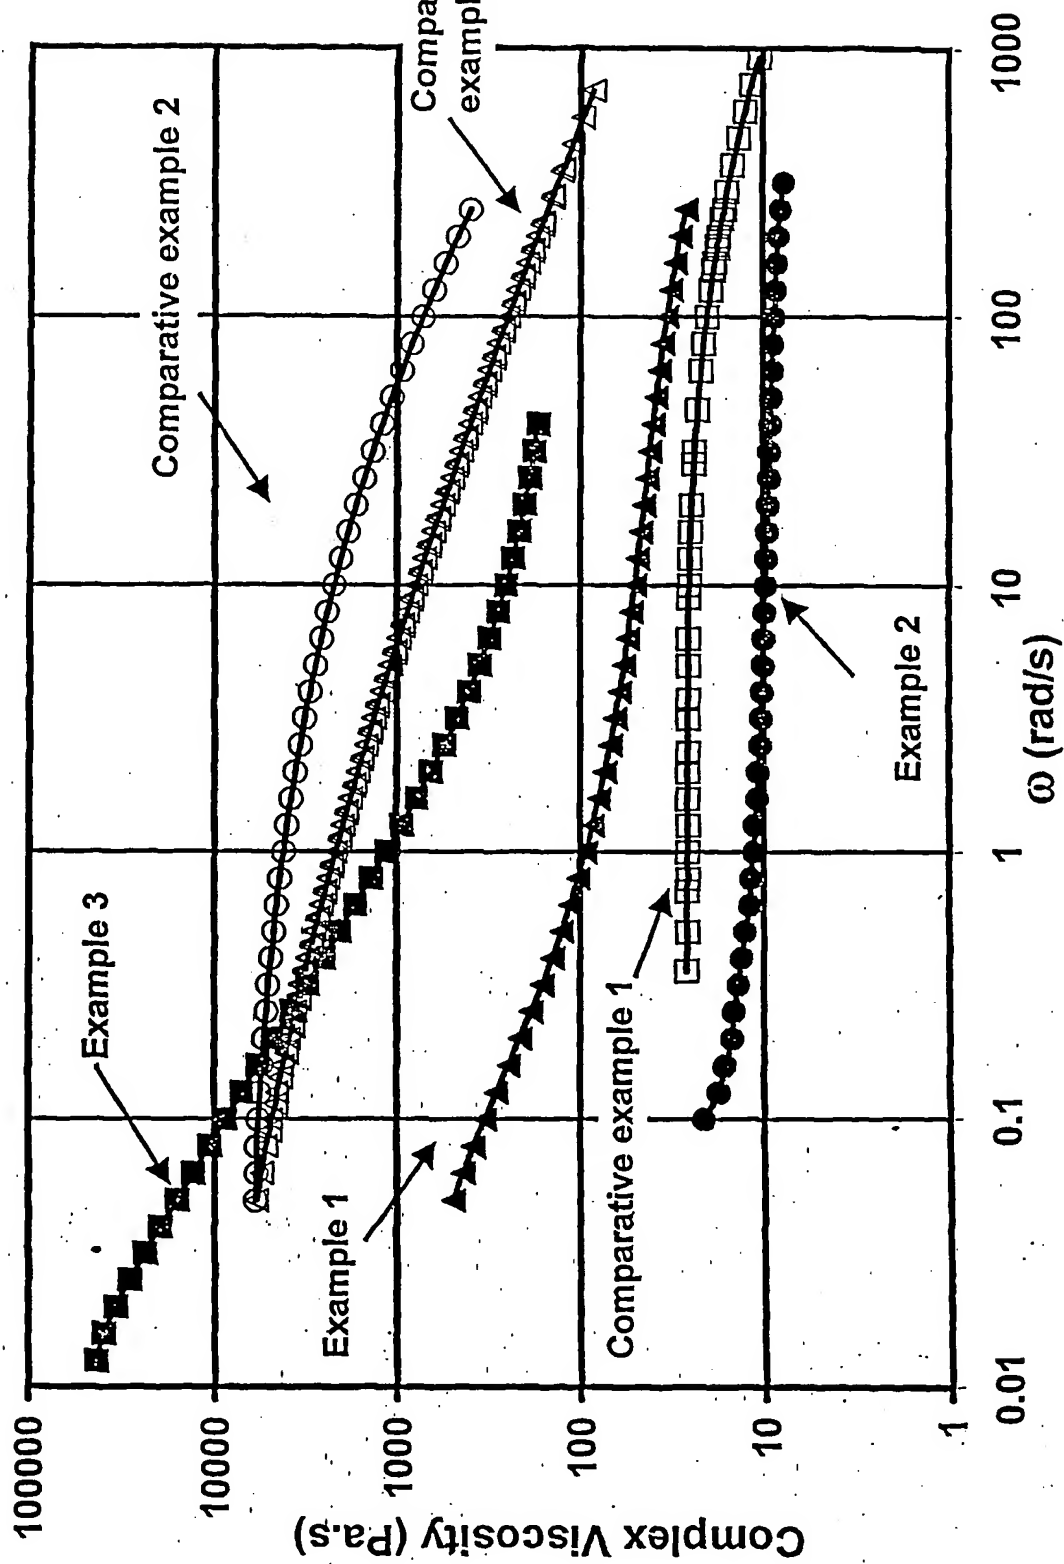


Figure 3

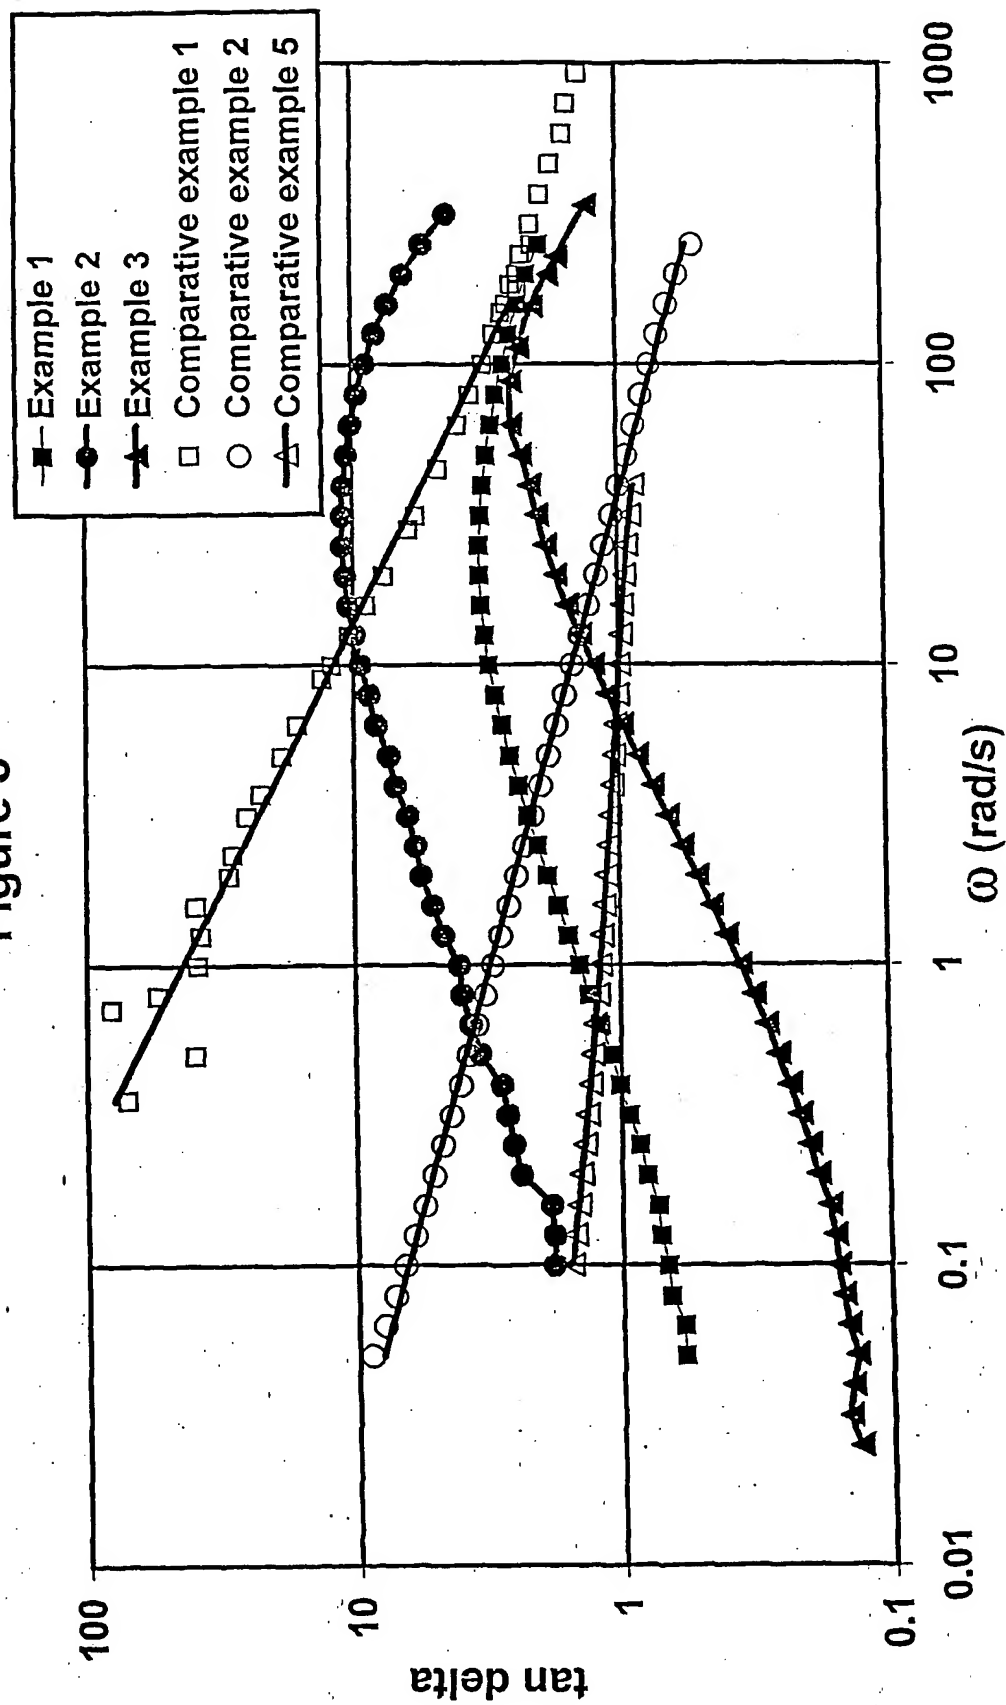

INTERNATIONAL SEARCH REPORT

Int. onal Application No

PC 17 EP 01/11489

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C08F110/06 C08F2/06 C08F2/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C08F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 00 12572 A (EXXON CHEMICAL PATENTS INC) 9 March 2000 (2000-03-09) cited in the application claims; examples	1-30
X	US 6 060 567 A (CHUM PAK-WING STEVE ET AL) 9 May 2000 (2000-05-09) cited in the application column 3, line 33 -column 4, line 45 column 8, line 28; claims	1-19
X	WO 99 41289 A (DOW CHEMICAL CO) 19 August 1999 (1999-08-19) cited in the application page 5, line 24 -page 13, line 4 page 18, line 24; claims	1-19
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

A document defining the general state of the art which is not considered to be of particular relevance

E earlier document but published on or after the International filing date

L document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

O document referring to an oral disclosure, use, exhibition or other means

P document published prior to the International filing date but later than the priority date claimed

T later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

Z document member of the same patent family

Date of the actual completion of the International search

4 February 2002

Date of mailing of the International search report

13/02/2002

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Kaumann, E

INTERNATIONAL SEARCH REPORT

Int. Patent Application No.

PCT/EP 01/11489

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 99 02540 A (BOREALIS AS ;REPO TIMO (FI); LESKELAE MARKKU (FI)) 21 January 1999 (1999-01-21) cited in the application page 2, line 11 - line 12 ----	1
X	EP 0 190 889 A (HIMONT INC) 13 August 1986 (1986-08-13) cited in the application claims; examples ----	20-30
X	EP 0 678 527 A (CHISSO CORP ;JAPAN ATOMIC ENERGY RES INST (JP)) 25 October 1995 (1995-10-25) cited in the application claims -----	20-30

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 01/11489

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0012572	A	09-03-2000	BR 9913647 A	05-06-2001
			CN 1309669 T	22-08-2001
			EP 1115761 A1	18-07-2001
			WO 0012572 A1	09-03-2000
			US 6225432 B1	01-05-2001
US 6060567	A	09-05-2000	US 5665800 A	09-09-1997
			US 5380810 A	10-01-1995
			US 5272236 A	21-12-1993
			US 2001041776 A1	15-11-2001
			US 6248851 B1	19-06-2001
			US 5525695 A	11-06-1996
			US 5783638 A	21-07-1998
			US 6194532 B1	27-02-2001
			US 6136937 A	24-10-2000
			US 5986028 A	16-11-1999
			CA 2120766 A1	29-04-1993
			DE 9219090 U1	25-09-1997
			DE 9219173 U1	25-03-1999
			DE 69220077 D1	03-07-1997
			DE 69220077 T2	20-11-1997
			DE 69228265 D1	04-03-1999
			DE 69228265 T2	02-06-1999
			EP 0608369 A1	03-08-1994
			EP 0783006 A2	09-07-1997
			EP 0899278 A2	03-03-1999
			EP 0899279 A2	03-03-1999
			ES 2103976 T3	01-10-1997
			ES 2127030 T3	01-04-1999
			FI 941727 A	31-05-1994
			JP 2963199 B2	12-10-1999
			JP 7500622 T	19-01-1995
			KR 262024 B1	15-07-2000
			KR 263803 B1	16-08-2000
			US 5427807 A	27-06-1995
			US 5562958 A	08-10-1996
			US 5395471 A	07-03-1995
			WO 9308221 A2	29-04-1993
			US 5582923 A	10-12-1996
			US 5674342 A	07-10-1997
			US 5685128 A	11-11-1997
			US 5591390 A	07-01-1997
			US 5773155 A	30-06-1998
			US 5595705 A	21-01-1997
			US 5852152 A	22-12-1998
			US 5677383 A	14-10-1997
			US 6140442 A	31-10-2000
			US 5972444 A	26-10-1999
			US 5847053 A	08-12-1998
			US 5863665 A	26-01-1999
			US 6111023 A	29-08-2000
			US 5278272 A	11-01-1994
			US 6316549 B1	13-11-2001
WO 9941289	A	19-08-1999	WO 9941289 A1	19-08-1999
			AU 2240999 A	30-08-1999
			BR 9907987 A	17-10-2000
			EP 1054910 A1	29-11-2000

INTERNATIONAL SEARCH REPORT

Information on patent family members

In International Application No

PCT/EP 01/11489

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9941289	A	CN 1289343 T	28-03-2001
		US 6258902 B1	10-07-2001
		US 2001029269 A1	11-10-2001
WO 9902540	A	21-01-1999	
		FI 972946 A	12-01-1999
		AU 8341498 A	08-02-1999
		EP 0994885 A1	26-04-2000
		WO 9902540 A1	21-01-1999
EP 0190889	A	13-08-1986	
		JP 2001509511 T	24-07-2001
		AT 88196 T	15-04-1993
		AU 616106 B2	17-10-1991
		AU 5215890 A	19-07-1990
		AU 597241 B2	31-05-1990
		AU 5284386 A	07-08-1986
		AU 7942891 A	12-09-1991
		BR 8600413 A	14-10-1986
		CA 1280543 A1	19-02-1991
		CN 86100791 A ,B	04-02-1987
		CN 1041769 A ,B	02-05-1990
		DE 3688258 D1	19-05-1993
		DE 3688258 T2	29-07-1993
		EP 0190889 A2	13-08-1986
		IN 166935 A1	11-08-1990
		IN 170549 A1	11-04-1992
		JP 7045551 B	17-05-1995
		JP 62121704 A	03-06-1987
		NO 860330 A	01-08-1986
		NO 167039 B	17-06-1991
		PT 81945 A ,B	01-02-1986
		RU 2031906 C1	27-03-1995
		US 5731362 A	24-03-1998
		US 4916198 A	10-04-1990
		US 5554668 A	10-09-1996
		US 5591785 A	07-01-1997
		ZA 8600528 A	24-09-1986
EP 0678527	A	25-10-1995	
		JP 3171422 B2	28-05-2001
		JP 7292024 A	07-11-1995
		DE 69503422 D1	20-08-1998
		DE 69503422 T2	11-02-1999
		EP 0678527 A2	25-10-1995
		US 5560886 A	01-10-1996

THIS PAGE BLANK (USPTO)